

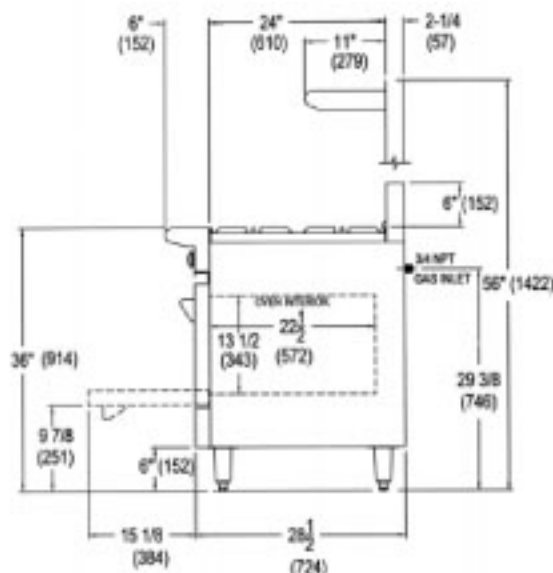



## Standard Oven Base

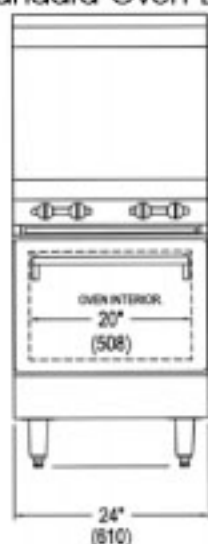

AR-4




AR12G-2B



AR24G



AR-2RB



## 24" Wide Range (20" Wide Oven)

MODEL	DESCRIPTION	TOTAL BTU	KW	SHIP. WT. Lbs.	Kg.
AR-4	(4) Burners	155,000	45.42	470	213
AR12G-2B	(1) 12" Griddle & (2) Burners	111,000	32.23	475	216
AR24G	24" Griddle	67,000	19.63	500	227
AR-2RB	24" Wide Radiant Broiler	87,000	25.49	530	240

### OPEN BURNERS

- Heavy duty sectioned cast iron top grates.
- Two piece, lift off top, easy clean burners, rated at 32,000 BTU/hr. each.
- One standing pilot for each burner, for instant ignition.
- Removable full width drip pan.

### GRIDDLES

- Highly polished thick steel griddle plate.
- 3" (76) wide grease drawer.
- One steel burner every 12" (305), rated at 20,000 BTU/hr.
- Non clog S/S pilot for each burner for automatic ignition.
- Manual control valve for each burner.
- S/S spatula width, grease trough with landing ledge.

### RADIANT BROILER

- Heavy duty, reversible cooking tracks with integral runners to direct grease to trough. The heavy castings retain heat to minimize recovery time during peak periods.
- Efficient, top ported burners rated at 15,000 BTU/hr. each with individual pilot and precision brass valves.

### AVAILABLE OPTIONS

- 6" (152) stub back.
- Casters (set of four).
- Extra Chrome Oven Rack.
- Cabinet base.
- Thermostat Griddle.
- Grooved griddle.
- Fish grate (only for radiant broiler).

Gas: Manifold pressure is 5.0" W.C. for natural gas or 10.0" W.C. for propane gas. Specify type of gas and altitude if over 2000 feet. 3/4" NPT Gas Inlet.  
 Clearances: For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) on sides, and 4" (102) from rear. Radiant broilers for non-combustible locations only!

American Range Corporation is a quality manufacturer of commercial cooking equipment. Because of continuing product improvements these specifications are subject to change without prior notice.

