Cold Air Compartment System



___ FEATURES / BENEFITS =__

EFFICIENT REFRIGERATION SYSTEM

M3's solid door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

■ COLD AIR COMPARTMENT

Our innovative "Cold Air Compartment" maintains temperature evenly for each pan to preserve fresh food longer. In addition, the compartment isolates pans from the reach-in area to prevent food spillage.

STAINLESS STEEL CABINET CONSTRUCTION

The Turbo Air M3 model boasts a stainless steel interior and exterior (except inside wall and the back). It guarantees the utmost in cleanliness and long product life. The M3 can add a touch of style to the most refined setting.

High-density Polyurethane Insulation

The entire cabinet structure and solid doors are formed-in-place using high density, CFC free polyurethane insulation.

MAGNETIC DOOR GASKETS

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

ADJUSTABLE, HEAVY DUTY, PE(POLYETHYLENE) COATED WIRE SHELVES

■ ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience. ABS sheet door liners resist water condensation with thermal efficiency.

CONVENIENT CUTTING BOARD SIDE RAIL

The new side rail cutting board bracket makes it easy to secure and remove the cutting board and it accepts different sizes too (max. 1/2" thickness)

Hot Gas Condensate System

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ REFRIGERATOR HOLDS 33°F ~ 39°F FOR THE BEST IN FOOD PRESERVATION

Model	Swing Door	CU./FT.	#of Shelves	#of Pans	#of Hood		AMPS	Crated Weight	LDH
						HP			
MST-28	1	7	1	8	1	1/3	6.6	198	271/2 x 30 x 37
MST-48	2	12	2	12	1	1/3	6.5	242	481/4 x 30 x 37
MST-60	2	16	2	16	1	1/2	8.9	330	601/4 x 30 x 37
MST-72	3	19	3	18	2	1/2	9.9	374	725/8 x 30 x 37

^{*} Height does not include 6-1/2" for caster height.

MODEL	MST-28	MST-48	MST-60	MST-72
Exterior Dimension (LxDxH)	271/2x30x37	481/4x30x37	601/4x30x37	725/8x30x37
Cubic Feet	7	12	16	19
Compressor (HP)	1/3	1/3	1/2	1/2
# of Shelves	1 ea	2 ea	2 ea	3 ea
Net Weight	181 lbs	225 lbs	308 lbs	325 lbs
Voltage (i) NEMA-5-15P	①115/60/1	①115/60/1	(i)115/60/1	①115/60/1
Amp	6.6 A	6.5 A	8.9 A	9.9 A
Cord Length (ft.)	9	9	9	9
Plug-ln	NEMA 5-15P	NEMA 5-15P	NEMA 5-15p	NEMA 5-15P
# of Pans	8 ea	12 ea	16 ea	18 ea

^{*}Design and specifications subject to change without notice.

■ WARRANTY: 1 Year Labor and Parts Warranty
Additional 4 Years Warranty on Compressor


- SELF-CONTAINED SYSTEM
- 2.5" CASTERS AVAILABLE FOR ALL MODELS (OPTIONAL)
- 5" SWIVEL CASTERS
- LEGS AVAILABLE FOR ALL MODELS (OPTIONAL)
- STANDARD 1/6 SIZE, 4" DEEP CONDIMENT PAN INCLUDED
- REMOTE CABINETS AND CONDENSING UNITS
 AVAILABLE FOR ALL MODELS.

14.3

23.9

51

(unit: inch)

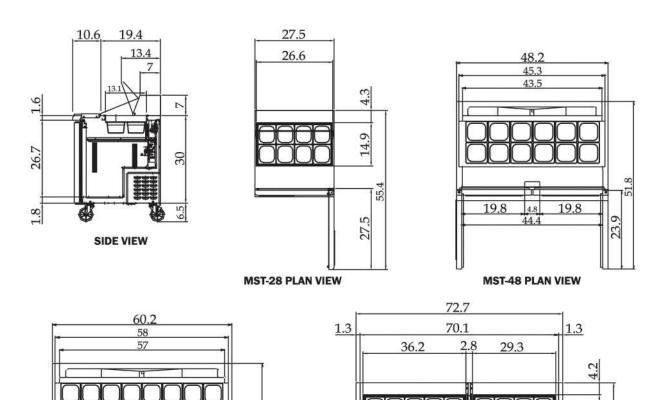

57

6

29.

MST-60 PLAN VIEW

25.8

25.8

MST-72 PLAN VIEW

19.8

19.5

68.9

19.8