



# Range Series 24

## STANDARD FEATURES:

- ◆ Frame constructed of heavy gauge metal solidly welded.
- ◆ All stainless steel front, sides, valve cover and kick plate.
- ◆ Heavy gauge stainless steel plate ledge.
- ◆ 11" deep stainless steel high shelf on standard backguard with stainless steel splash panel.
- ◆ Cast iron top grates, 12" x 12", for open burners.
- ◆ Two piece, heavy duty lift off cast iron burner heads, rated at 30,000 BTU/hr.
- ◆ Spill protected standing pilot on each open burner for instant safe ignition.
- ◆ Oven contact surfaces have porcelain finish for easy maintenance.
- ◆ Oven door constructed for heavy use, easily removable for cleaning.
- ◆ Oven safety valve provides 100% shut down if pilot flame goes out.
- ◆ Piezo type, push button (matchless) ignition to light the standing pilot on the oven.
- ◆ "U" shape Oven Burner provides 27,000 BTU/hr for consistent heating. Oven design enhances airflow.
- ◆ 5/8" thick griddle plate, highly polished, with 3" wide grease trough.
- ◆ Full width removable crumb/drip trays under open burners.

## OPTIONS:

- ◆ Griddle section. Highly polished 3/4" thick plate, 12" or 24" wide.  
*Note: Each 12" of griddle replaces one pair of open burners.*
- ◆ Thermostatic control for the griddle (3/4" thick plate).
- ◆ Extra oven rack (One per oven is standard).
- ◆ 6" High Casters (2 locking, 2 swivel).
- ◆ 6" High stainless steel stub back in lieu of the high shelf assembly.
- ◆ Saute or wok style burner heads.
- ◆ 10" diameter stainless steel wok ring (fits over top grate).
- ◆ Hot Top section 12" wide x 24" deep.
- ◆ Seismic Flanged Feet.




RR-4 Shown  
With Optional Casters

*Royal Restaurant ranges have been designed to give the most useful features at an affordable cost. All stainless steel sides, and front panels, including the oven doors and kick plate are easily cleaned and rugged enough to withstand the constant heavy usage of a busy kitchen. Oven interiors are porcelain coated on all contact surfaces for fast and easy cleanup. The ovens are thermostatically controlled with 100% safety on the pilots to shut off the oven gas flow if the flame should go out. There is a push button ignitor for easy lighting of the oven pilot. 12" x 12" heavy cast iron grates cover the unique two piece lift off burners, rated at 30,000 BTU/hr. each.*

ROYAL RANGE OF CALIFORNIA, INC.  
3245 CORRIDOR DRIVE, MIRA LOMA, CA 91752  
(800) 769-2414 in the U.S. (951) 360-1600 Fax: (951) 360-7500  
www.royalranges.com E-mail: royarrange@dslextreme.com  
PRINTED IN THE U.S.A. (02/11)



# **24" Range Series Specifications**

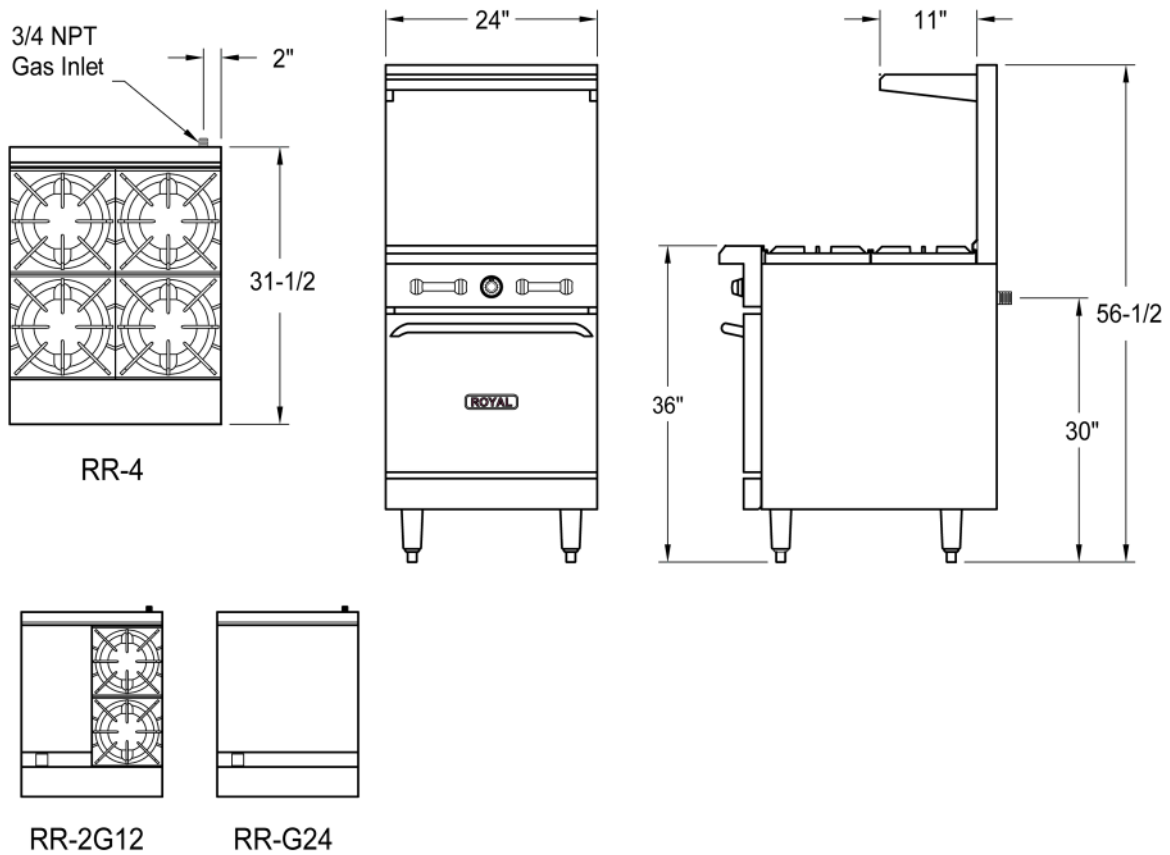

<b>MODEL NUMBER<sup>1</sup></b>	<b>OPEN BURNERS<sup>2</sup></b>	<b>GRIDDLE BURNERS<sup>3</sup></b>	<b>OVEN BURNERS<sup>4, 1</sup></b>	<b>TOTAL BTU</b>	<b>SHIP WEIGHT</b>
RR-4	4	0	1	147,000	400 Lbs.
RR-2G12	2	1	1	107,000	420 Lbs.
RR-G24	0	2	1	67,000	440 Lbs.
RR-4SU	4	0	1	147,000	410 Lbs.

**NOTES:**

1. Add suffix "-XB" for open storage, no oven and deduct 27,000 BTU'S
2. Open Burners @ 30,000 BTU/HR. each.
3. Griddle Burners: 1 per 12" @ 20,000 BTU/HR. each.
4. Oven Burners @ 27,000 BTU/HR.

**Gas Connection:** 3/4" NPT on the right hand rear of the appliance  
The pressure regulator (supplied) is to be connected here by the installer.

**Gas pressure:** 5" W.C. - Natural Gas  
10" W.C. - Propane

**Combustible Clearances:**  
15 inches sides  
4 inches rear

**Non-combustible Clearances:**  
0 inches sides  
0 inches rear

**Specify type of gas and altitude,**  
if over 2,000 feet, when ordering.