



Item # \_\_\_\_\_

# **RCM** Cheesemelter Broiler



**RCM-36 Shown**

### **STANDARD FEATURES:**

- ◆ All stainless steel front and sides.
- ◆ Fully adjustable infra-red burners provide powerful radiant heat.
- ◆ Standing pilot for instant ignition.
- ◆ Heavy duty chrome rack. 2 positions available.
- ◆ Full width removable crumb pan for easy cleaning.
- ◆ Wall mount brackets included for easy wall mounting.

### **OPTIONS:**

- ◆ Range mounting kits to mount onto high shelf of any size range  
*Note: Width of the unit cannot exceed the width of range to which it is to be attached.*


**Royal Cheese-Melter Broilers offer versatility, high performance, and heavy duty features designed to last. They are the perfect design for the preparation of melted cheese dishes for Mexican and Italian specialties.**

**Highly efficient infra-red burner and adjustable gas valve with continuous pilots for instant ignition capability. Stainless steel front and sides are easy to clean and durable. Chrome plated racks and a full width drip pan for easy cleanup.**

ROYAL RANGE OF CALIFORNIA, INC.  
3245 CORRIDOR DRIVE, MIRA LOMA, CA 91752  
(800) 769-2414 in the U.S. (951) 360-1600 Fax: (951) 360-7500  
www.royalranges.com E-mail: royorange@dslextreme.com  
PRINTED IN THE U.S.A. (02/11)



## **Specifications RCM Cheesemelters**

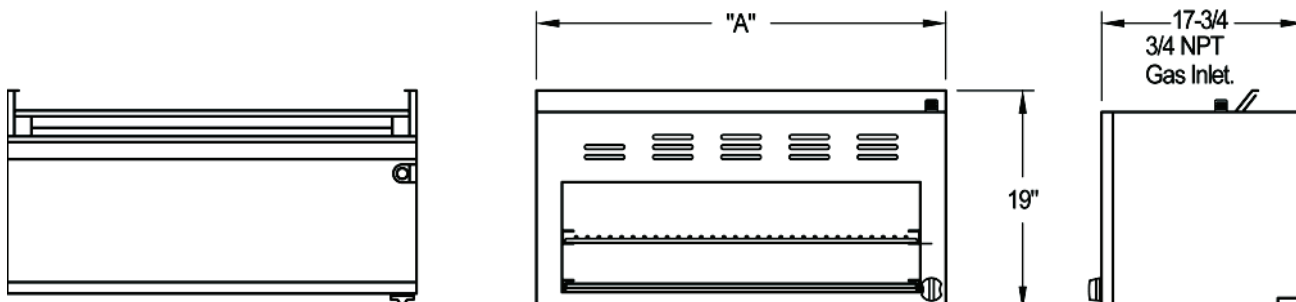

MODEL NO.	WIDTH (A)	DEPTH	NUMBER * OF BURNERS	TOTAL BTU	SHIP WEIGHT
RCM-24	24"	17-3/4"	1 <sup>1</sup>	20,000	105 Lbs.
RCM-36	36"	17-3/4"	1 <sup>2</sup>	35,000	165 Lbs.
RCM-48	48"	17-3/4"	2 <sup>1</sup>	40,000	210 Lbs.
RCM-60	60"	17-3/4"	2 <sup>1&amp;2</sup>	55,000	275 Lbs.
RCM-72	72"	17-3/4"	2 <sup>2</sup>	70,000	335 Lbs.
* Note:			1. Infra-red burner rated @ 20,000 BTU/hr. each. 2. Infra-red burner rated @ 35,000 BTU/hr. each.		

**Gas Connection:** 3/4" NPT on the right hand rear at the top of the appliance  
 The pressure regulator (supplied) is to be connected here by the installer.

**Gas pressure:** 5" W.C. - Natural Gas  
 10" W.C. - Propane

**Combustible Clearances:**

4 inches sides  
 4 inches rear

**Non-combustible Clearances:**

0 inches sides  
 0 inches rear

**Specify type of gas and altitude,  
 if over 2,000 feet, when ordering.**

*Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification*